

stripLite SL 4000

Energy efficient LED enclosure lighting

UNIVERSAL USE

Wide voltage range
24 V- 265 V AC / DC

MOTION SENSOR

Sensitive sensor with
5 minute setting

TOUGH HOUSING

Polycarbonate housing

ROCKER SWITCH

CONNECTOR OPTIONS

Wieland plug or push-wire type connectors

DAISY CHAIN

Daisy chain cables available to connect multiple lights

MOUNTING

Integrated magnets or plastic clips (provided)

PUSH TO RELEASE

Applicable to both Wieland and push-wire type connectors





stripLite SL-4000			
Type	24 - 265 V	12 V	120 - 230 V
Order no. with motion sensor, Wieland	400000	400012	400076
Order no. with motion sensor, push fit	400400	400412	n/a
Order no. with ON/OFF switch, Wieland	400100	400112	400176
Order no. with ON/OFF switch, push fit	400500	400512	n/a
PERFORMANCE DATA			
Power Consumption	4 Watt		8 Watt
Light output (luminous flux)	400 Lm	300 Lm	700 Lm
Light color / temperature	Cool white / 6,500K		
Lamp type	LED, 120° angle		
Life time (@ 20°C)	50,000 hrs.		
Operating temp. range	-30°C - +70°C -22°F - 158°F		
Switch off time (motion sensor)	5 min.		
DIMENSIONS			
Dimensions (L x W x H)	357.4 x 32 x 35.5 (31.16) mm 14.07 x 1.26 x 1.40 (1.23) inch		
Material housing	PC clear (Top), PC blue (Base)	PC frosted (Top), PC blue (Base)	
Weight	140 gr. 0.30 lbs.		
ELECTRICAL DATA			
Voltage / Frequency	24 - 265 V AC / DC ~ 50/60 Hz	12 V DC	120 - 230 V AC / DC ~ 50/60 Hz
Protection class	II (double insulated)		
IP protection to IEC 60 529	IP 20		
Mounting	Magnets, clips		
Max daisy chain number of lights	16	8	12
Certification	CE, cURus		

MAIN FEATURES

- Combined AC & DC voltage range allows the universal use with a single model
- Motion sensor or ON/OFF switch available
- Various fitting options for more flexibility
- Daisy chain cables available to connect multiple lights
- Wieland or push fit connector for fast and easy installation

Light distribution curve

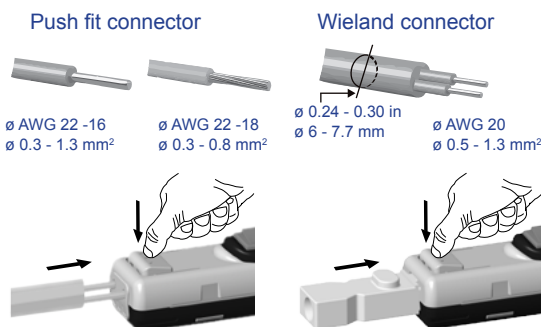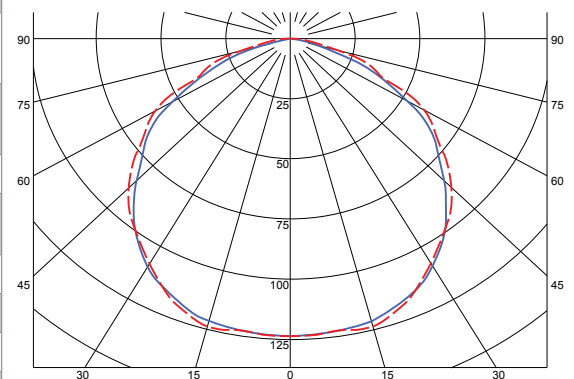

DAISY CHAIN INSTALLATION



Daisy chain cables available to connect multiple lights

Seifert Systems GmbH	Seifert Systems Ltd.	Seifert Systems AG	Seifert Systems Inc.	Seifert Systems Australia Pty Ltd.
Albert - Einstein Str. 3 42477 Radevormwald	HF 09/10 Hal Far Industrial Estate Birzebbuga, BBG 3000	Wilerstraße 16 CH- 4563 Gerlafingen	75 Circuit Drive North Kingstown RI 02852 USA	105 Lewis Road Wantima South 3152 Victoria Australia
Germany	Malta	Switzerland		
Tel. +49 (0) 2195 68994-0 Fax +49 (0) 2195 6899420	Tel. +356 2220 7000 Fax +356 2165 2009	Tel. +41 (0) 32 675 35 51 Fax +41 (0) 32 675 44 76	Tel. +1 401-294-6960 Fax +1 401-294-6963	Tel. +61 (3) 98 01 19 06 Fax +61 (3) 98 87 08 45
info.de@seifertsystems.com	info@seifertsystems.com	info.ch@seifertsystems.com	info.us@seifertsystems.com	info@seifertsystems.com.au